

BOS-G



◆ **Convenient**

Quick installation standard of 19-inch embedded designed module is comfortable for installation and maintenance.

◆ **Safe and reliable**

Cathode material is made from LiFePO₄ with safety performance and long cycle life, The module has less self-discharge, up to 6 months without charging it on shelf, no memory effect, excellent performance of shallow charge and discharge.

◆ **Intelligent BMS**

It has protection functions including over-discharge, over-charge, over-current and over-high or low temperature. The system can automatically manage charge and discharge state and balance current and voltage of each cell.

◆ **Eco-friendly**

The whole module is non-toxic, non-polluting and environmentally friendly.

◆ **Flexible configuration**

Multiple battery modules can be in parallel for expanding capacity and power. Support USB upgrade, wifi upgrade(optional), remote up grade(Compatible with Deye inverter).

◆ **Wide temperature**

Working temperature range is from -20°C to 55°C, with excellent discharge performance and cycle life.

Model	BOS-G		
-------	-------	--	--


Main Parameter			
Cell Chemistry	LiFePO4		
Module Energy (kWh)	5.12		
Module Nominal Voltage (V)	51.2		
Module Capacity (Ah)	100		
Battery Module Qty In Series (Optional)	3 (Min)	8	12 (Max)
System Nominal Voltage (V)	153.6	409.6	614.4
System Operating Voltage (V)	124.8~175.2	332.8~467.2	499.2~700
System Energy (kWh)	15.36	40.96	61.44
System Usable Energy (kWh) ¹	13.8	36.86	55.29
Charge/Discharge ² Current (A)	Recommend	50	
	Nominal	100	
	Peak Discharge (2 mins, 25°C)	125	
Working Temperature (°C)	Charge: 0~55/Discharge: -20~55		
Status Indicator	Yellow: Battery High Voltage Power On Red: Battery System Alarm		
Communication Port	CAN2.0/ RS485		
Humidity	5%~85%RH		
Altitude	≤2000m		
IP Rating of Enclosure	IP20		
Dimension (W/D/H,mm)	589*590*1640		589*590*2240
Weight Approximate (kg)	258	434	628
Installation Location	Rack Mounting		
Storage Temperature (°C)	0~35		
Recommend Depth of Discharge	90%		
Cycle Life	25±2°C,0.5C/0.5C, EOL70%≥6000		
Warranty ³	10 years		
Certification	CE/IEC62619 /VDE2510-50/ UL1973 /UL9540A/UN38.3		

- DC Usable Energy, test conditions: 90% DOD, 0.2C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.
- The current is affected by temperature and SOC.
- The warranty is due whichever reached first of warranty period or life cycle power.

Model	Description
-------	-------------

HVB750V/100A-EU High Voltage Battery cluster control box conforming to European or British Standards

Operating Voltage 120 ~ 750Vdc
 Nominal Charge/Discharge Current 100A
 Max.Charge/Discharge Current 125A
 DC Input Rating 12±2%/4.15A
 Operating Temperature Range -20~65°C
 Ingress Protection IP20
 Dimension (W/D/H) 440*570*150mm
 Weight **Approximate** 15.5kg

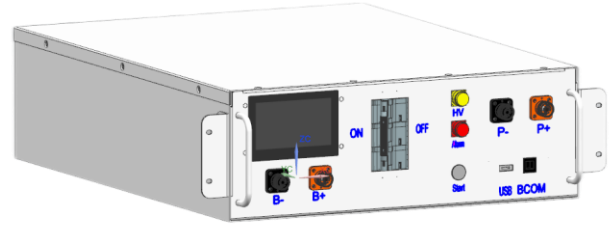


HVB750V/100A-US High Voltage Battery cluster control box conforming to North American Standard

Operating Voltage 120 ~ 750Vdc
 Nominal Charge/Discharge Current 100A
 Max.Charge/Discharge Current 125A
 DC Input Rating 12±2%/4.15A
 Operating Temperature Range -20~65°C
 Ingress Protection IP20
 Dimension (W/D/H) 440*570*150mm
 Weight Approximate 17kg




High voltage box Standard configuration:

- ① 120 ohm terminal resistance
- ② 140mm communication cable
- ③ 220mm power cable
- ④ 1.5m power cable (US Version)
2.1m power cable (EU Version)
- ⑤ Power plug

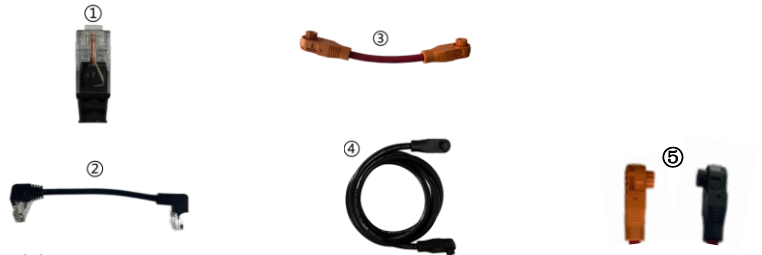

BOS-GM5.1 5.12 kwh battery module

Battery Type LiFePO4(LFP)
 Nominal Voltage 51.2Vdc
 Rated Capacity 100Ah
 Rated Energy 5.12kWh
 Nominal Charge/Discharge Current 100A
 Peak.Discharge Current 125A
 Charge Temperature 0~55°C
 Discharge Temperature -20°C ~ 55°C
 Storage Temperature 0°C ~ 35°C
 Ingress Protection IP20
 Dimension (W/D/H) 440*570*133mm
 Weight **Approximate** 44kg

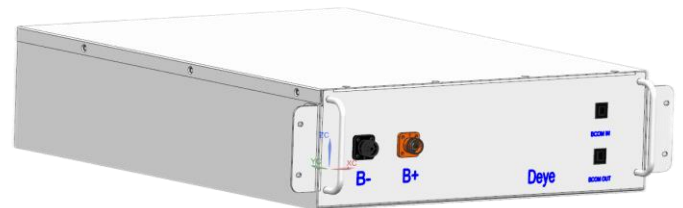

Battery module Standard configuration:

- ① 110mm communication cable
- ② 200mm power cable



EPCable5.0(Optional) Standard 5-meter power cable connected to the positive pole of the external PCS

1000V/4AWG cable



ENCable5.0(Optional) Standard 5-meter power cable connected to the negative pole of the external PCS

1000V/4AWG cable



Model	Description
EPWR Cable5.0(Optional)	Standard 5-meter cable connected to external 12VDC power supply




ECOM Cable5.0(Optional)	Standard 5-meter communication cable connected to the external device
-------------------------	---



3U-HRACK(Optional)	Standard 19inch rack, caninstall 12 pcs batteries and 1 pcs High Voltage Battery cluster control box
--------------------	--

Dimension (W/D/H)	589*590*2240mm
Weight Approximate	85kg

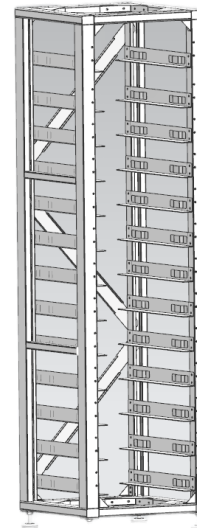

3U-LRACK(Optional)	Standard 19inch rack, caninstall 8 pcs batteries and 1 pcs High Voltage Battery cluster control box
--------------------	---

Dimension (W/D/H)	589*590*1640mm
Weight Approximate	65kg

